


FUEL - OIL HOSE

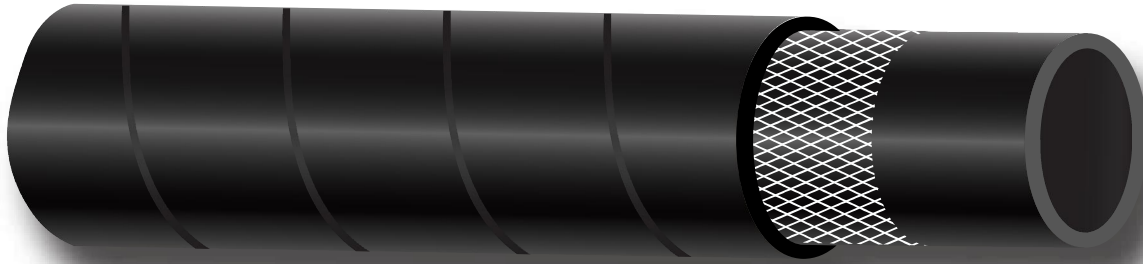

- TUBE : Oil Resistant Synthetic Rubber
- REINFORCEMENT : High Tenacity Synthetic Textile single braid
- COVER : Synthetic rubber resistant to oil , abrasion and ozone
- TEMP RANGE : -40°C + 100°C (-40°F +212°F)
- APPLICATIONS : Design to be used for transfer of fuel in engine compartments
- PROPERTIES : Uniform Thickness
High Pressure
Flexible
Oil resistance
- STANDARD COLOUR AND FINISH : Inner Tube - Black
Outer cover - Black
Finish - Smooth/Wrapped
- APPLICABLE STD : SAE J 30 R2 TYPE 3

PART NO.	INNER DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHFU112-05	3/16	4.8	11.1	35	510	140	2030	2.0	50	0.150	50 / 100
EHFU112-06	1/4	6	12.4	30	435	115	1670	2.6	65	0.170	50 / 100
EHFU112-08	5/16	8	14.3	30	435	115	1670	3.0	75	0.190	50 / 100
EHFU112-10	3/8	10	16	30	435	115	1670	3.3	85	0.260	50 / 100
EHFU112-12	1/2	12.5	19.8	30	435	115	1670	3.9	100	0.400	50 / 100
EHFU112-16	5/8	16	23	25	365	85	1235	4.9	125	0.450	50 / 100
EHFU112-19	3/4	19	26.5	25	365	85	1235	5.9	150	0.500	50 / 100
EHFU112-25	1	25	35	20	300	60	900	7.9	200	0.560	50 / 100